

# KTE / KTU / KTW8000...CS Series

## Submersible pressure transducers



### FEATURES

- 250 to 5000 mbar, 5 to 70 psi, 2.5 to 50 mH<sub>2</sub>O (1 mH<sub>2</sub>O ≈ 3 ft) gage<sup>1</sup> pressure
- For corrosive media
- 0...10 V or 4...20 mA output
- Field interchangeable
- EMC according to EN 61326-1<sup>11</sup>

### MEDIA COMPATIBILITY

Wetted materials:  
PPS, ceramic Al<sub>2</sub>O<sub>3</sub>, NBR (FKM), PUR (PE/FEP)

Protection class:  
IP 68 (according to DIN EN 60529, NEMA 6P)<sup>1</sup>



### SPECIFICATIONS<sup>8,9</sup>

#### Maximum ratings


Supply voltage (reverse polarity protection)	
KT...0...	13...32 V
KT...4... <sup>2</sup>	9...32 V
Load current	
KT...0...	1 mA
Proof pressure <sup>3</sup>	2 x rated pressure

#### Environmental


Temperature limits	
Storage	-25...70 °C
Operating	-10...70 °C
Compensated	0...70 °C
Vibration (5 to 500 Hz)	10 g <sub>RMS</sub>
Mechanical shock	50 g

### ELECTRICAL CONNECTION

#### Voltage output device

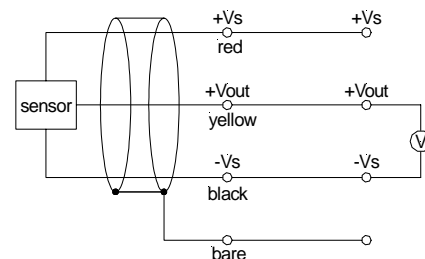

#### Current output device

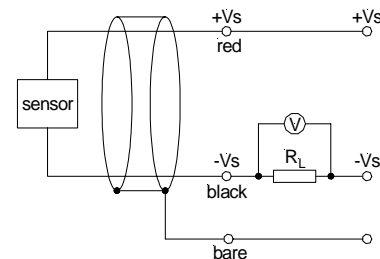

# KTE / KTU / KTW8000...CS Series

## Submersible pressure transducers

### COMMON PERFORMANCE CHARACTERISTICS

( $V_s=15\text{ V} \pm 0.1\text{ V}$ ,  $T_A=25\text{ °C}$ , RH=50 %)

Characteristics		Min.	Typ.	Max.	Unit
Thermal effects (0...70°C) <sup>4</sup>	Offset		±0.03	±0.06	%FSO/°C
		devices up to 1 bar/10 m H <sub>2</sub> O/15 psi			
		all others		±0.02	
	Span		±0.02	±0.04	
Thermal effects (-10...0 °C) <sup>4</sup>	Offset		±0.03		%FSO
	Span		±0.03		
Non-linearity (BSL) <sup>5</sup> , hysteresis and repeatability			±0.1	±0.3	%FSO
Long term stability <sup>6</sup>			±0.1	±0.3	
Output noise (0 < f < 1 kHz)			±0.1		
Response time (10 to 90 %)			35		ms
D/A resolution				11	bit
Power supply rejection	Offset		±0.01		%FSO/V
	Span		±0.02		

### INDIVIDUAL PERFORMANCE CHARACTERISTICS

( $V_s=15\text{ V} \pm 0.1\text{ V}$ ,  $T_A=25\text{ °C}$ , RH=50 %)

#### 0...10 V output ( $R_L > 100\text{ k}\Omega$ )

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset		0	0.1	V
Full scale span <sup>7</sup>	9.9	10	10.1	
Output impedance			25	Ω
Current consumption (no load)		4		mA


#### 4...20 mA output ( $R_L=100\text{ }\Omega$ )

Characteristics	Min.	Typ.	Max.	Unit
Zero pressure offset	3.9	4.0	4.1	mA
Full scale span <sup>7</sup>	15.9	16.0	16.1	
Power consumption ( $I_L = 20\text{ mA}$ )		250		mW

# KTE / KTU / KTW8000...CS Series

## Submersible pressure transducers


### OUTLINE DRAWING<sup>1</sup>

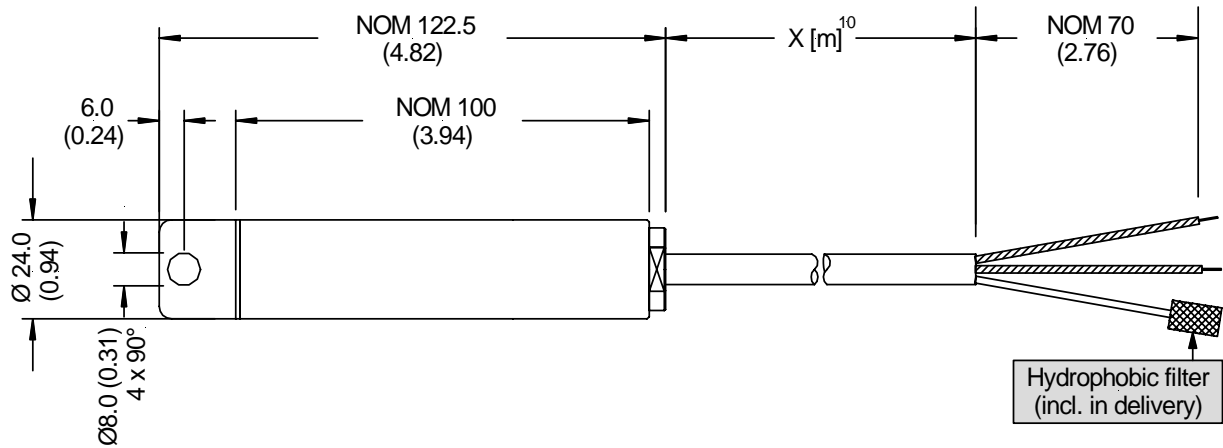

mass: approx. 75 g (without cable)

dimensions in mm (inches)

### LOAD LIMITATION (4...20 mA output version)

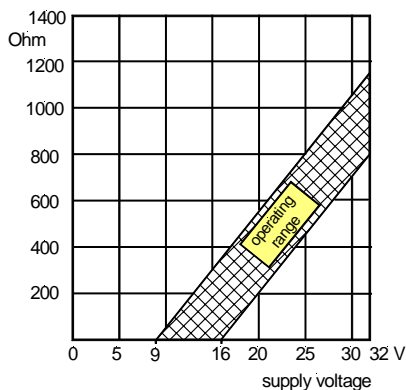

### ELECTRICAL CONNECTION (cont.)

WIRE CONNECTION		
Colour	0...10 V	4...20 mA
red	+Vs	+Vs
black	-Vs	-Vs
yellow	Vout	-
bare	shield	shield
transparent	vent tube <sup>1</sup>	vent tube <sup>1</sup>

### RECOMMENDED ACCESSORY (not included in delivery)

ZA000850: Cable hanger

ZA004151: Desiccant filter box


#### Specification notes:

1. The package is an all-sealed housing. For proper function the gage port is vented to the atmosphere through the connecting cable. Thus the vent tube of the cable end must have access to the ambient pressure.
2. The minimum supply voltage is directly proportional to the load resistance seen by the transmitter. For more details see the load limitation diagram.
3. Proof pressure is the maximum pressure which may be applied without causing damage to the sensing element.
4. Thermal effects are relative to 25 °C. Signal is clamped at 0 V.
5. Non-linearity refers to Best Straight Line fit. Hysteresis is the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure.
6. Long term stability is the change in output after one year.
7. Span is the arithmetic difference in transmitter output signal measured at zero pressure and the maximum operating pressure.
8. CE-labelling is in accordance with 2004/108/EC.
9. The pressure transmitters must not be used as safety accessories according to article 1, 2.1.3 of the directive 97/23/EC.
10. Cable length for 0...10 V versions is max. 10 m.
11. Surge immunity according to EN 61000-4-5 for current output devices with cable lengths longer than 10 m. For shorter cable lengths please contact First Sensor.

# KTE / KTU / KTW8000...CS Series

## Submersible pressure transducers

### ORDERING INFORMATION

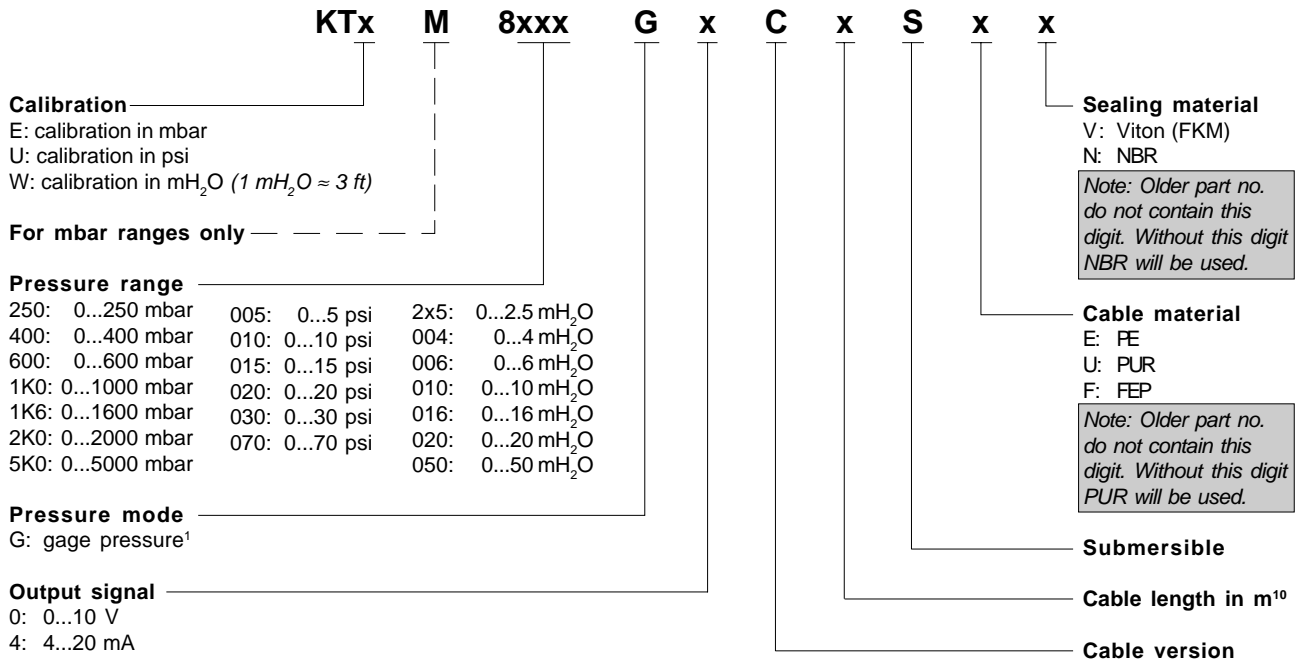

**Other pressure ranges and options are widely available. Please contact First Sensor.**

First Sensor reserves the right to make changes to any products herein. First Sensor does not assume any liability arising out of the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.