

**FEATURES**

Single-axis (**ADXL195**) and dual-axis (**ADXL295**) configurations

$\pm 120 g$  baseband acceleration channel

12-bit resolution at 62.5 mg/LSB

512 kHz data interpolation rate

40  $g_{AVG}$  high frequency signal processing channel

10-bit resolution at 83.3 mg avg/LSB

128 kHz data interpolation rate

Sensor frequency response down to dc

On-demand electromechanical self-test

On-demand HF signal injection self-test

Fully differential circuitry for high resistance to EMI/RFI

Independent x- and y-axis sense structures for robust

FMEA performance

Independent x- and y-axis arming thresholds

Low noise

1 LSB rms (12-bit baseband acceleration channel)

2 LSB rms (10-bit high frequency acceleration channel)

Qualified for automotive applications

Temperature range:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

3.3 V and 5 V operation

**APPLICATIONS**

Enhanced crash sensing

Shock detection

**GENERAL DESCRIPTION**

The **ADXL195/ADXL295** are dual spectrum accelerometers that measure baseband acceleration in up to two axes (XL-X and XL-Y), as well as high frequency (HF) acceleration energy. Identical, independent X and Y sense structures are implemented to achieve the best possible fail-safe performance.

The XL-X and XL-Y channels output baseband acceleration information with a nominal full-scale range of  $\pm 120 g$  and a bandwidth of 408 Hz. The acceleration data is provided as a 12-bit, two's complement word with a resolution of 62.5 mg/LSB.

HF acceleration within the frequency band of 15.5 kHz to 23 kHz is rectified and filtered to generate an average  $g$  ( $g_{AVG}$ ) energy measurement. The HF channel has a nominal full-scale range of 40  $g_{AVG}$  and a bandwidth of 393 Hz. When combined with the XL-X and XL-Y information, HF acceleration information allows for enhanced vehicle impact detection and discrimination.

The **ADXL195/ADXL295** are available in a 16-lead, narrow-body SOIC package with an exposed pad. The **ADXL195/ADXL295** can operate at 3.3 V and 5 V and are specified for operation from  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$ .

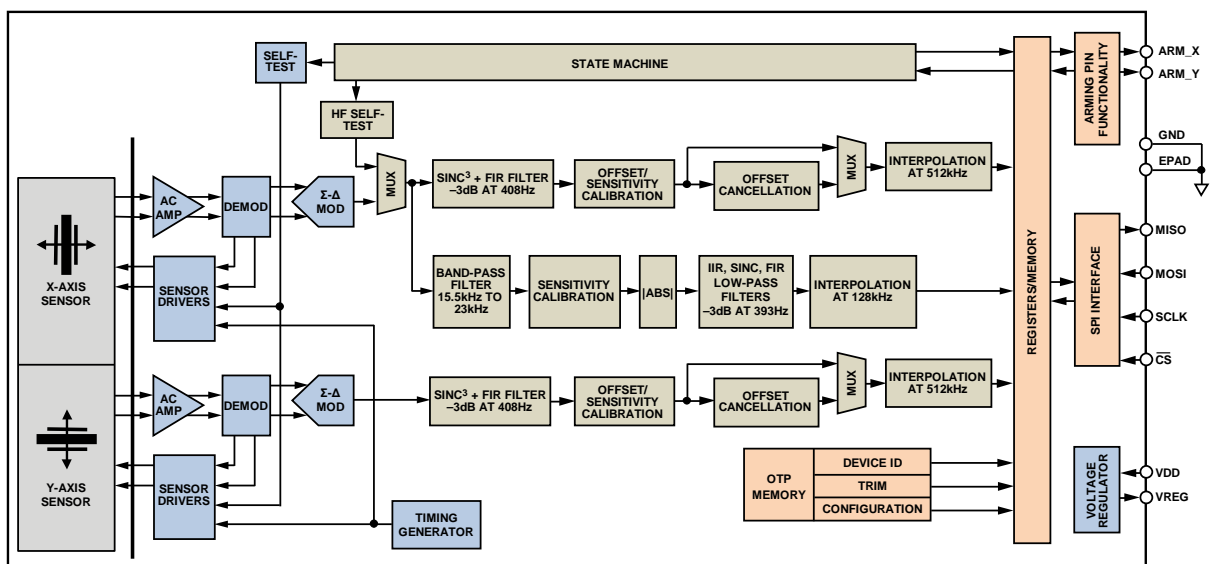
**FUNCTIONAL BLOCK DIAGRAM**


Figure 1.

For more information about the **ADXL195/ADXL295**, please contact the Analog Devices, Inc., *Customer Interaction Center* at [http://www.analog.com/en/content/technical\\_support\\_page/fca.html](http://www.analog.com/en/content/technical_support_page/fca.html) to connect with a technical support specialist.

Rev. SpA

**Document Feedback**

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.  
 Tel: 781.329.4700 ©2012–2013 Analog Devices, Inc. All rights reserved.  
**Technical Support** [www.analog.com](http://www.analog.com)

**NOTES**